


## 7218ATYNSULP4

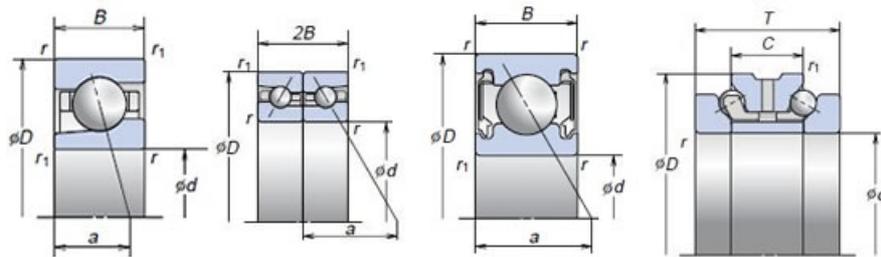

<b>New Designations :</b>	<a href="#">7218ATYNSULP4</a>	
<b>Old Code :</b>	7218ATYNSULP4	
<b>Main demensions :</b>	90 × 160 × 30	Bore Dia × Outside Dia × Width Dia (mm)
<b>M :</b>	2.23 kg	Weight
<b>ID :</b>	90 mm	Inside diameter(I.D.)
<b>OD :</b>	160 mm	Outside diameter(O.D.)
<b>T(B) :</b>	30 mm	Thickness(W.D.)
<b>C :</b>	113.000 kN	Radial dynamic load rating
<b>C0 :</b>	96.500 kN	Radial static load rating
<b>Grease rpm :</b>	6000 r/min	Reference speed
<b>Oil rpm :</b>	8000 r/min	Limiting speed
<b>Interchangeable :</b>	NSK	
<b>Category :</b>	Precision Bearings	

**Web:** <https://en.tradebearings.com/>

**Email:** [admin@tradebearings.com](mailto:admin@tradebearings.com)