


# 1202

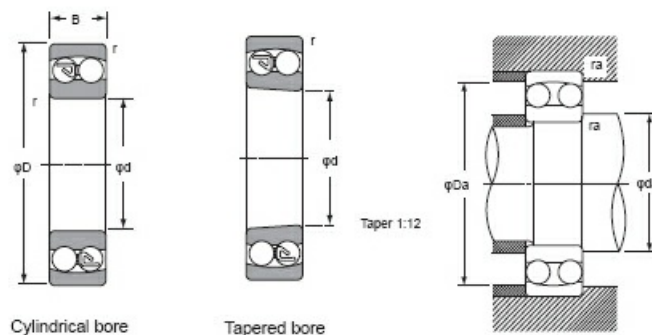

## Technical sheet of 1202

<b>Type :</b>	Self-aligning Ball Bearings	
<b>Model :</b>	<a href="#">1202</a>	
<b>Old Code :</b>	1202	
<b>Main demensions :</b>	15 mm × 35 mm × 11 mm	Bore Dia × Outside Dia × Width Dia
<b>M kg:</b>	0.049	Mass
<b>HS Code :</b>	8482101000	Bearing customs code
<b>d mm:</b>	15	inner ring diameter
<b>D mm:</b>	35	Outer ring diameter
<b>B(T) mm:</b>	11	Overall Width
<b>Cr kN:</b>	7.45	Radial dynamic load rating
<b>C0r kN:</b>	1.75	Radial static load rating
<b>Grease r/min:</b>	18000	Reference speed
<b>Oil r/min:</b>	22000	Limiting speed

### Detailed parameters and installation dimensions:

r(min.): 0.6 mm, da(min.): 19 mm, Da(max.): 31 mm, ra(max.): 0.6 mm, e: 0.33 , Y1: 1.9 , Y2: 2.95 , Y0: 2

Part Number: 1202 CFC

Bearing Type: Self Aligning Ball Bearing Double Row

Bearing Size (metric): Inner dia. (d): 15 mm X Outer dia. (D): 35 mm X Width (B): 11 mm or Size: 15 mm \* 35 mm \* 11 mm

Original Equipment Manufacture(OEM NO.): 1202

Bore: C (Cylindrical Bore)

Seals Type: No Seal

Cage Design: S (Steel or Standard Cage)

Radial internal clearance: Cn (Normal Internal clearance)

Precision Rating: Standard class precision

Type of lubrication: Standard class lubrication

Thermal Stability: No Thermal Stability - Temperatures up to 120°C

**Tradebearing(TBS): <https://en.tradebearings.com/>**

Email: [admin@tradebearings.com](mailto:admin@tradebearings.com)

Whatsapp/Mob.: +86 15906428604