


53520

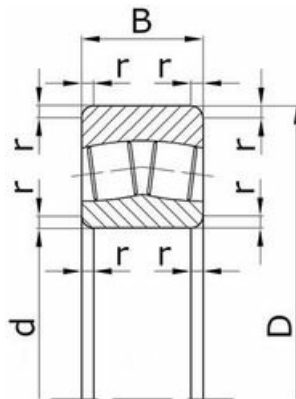

Technical sheet of 53520

What are the Benefits of choosing 53520 bearings?

- **Self-aligning:** Automatically compensates for shaft bending or installation errors, making it less prone to damage.
- **High load-bearing capacity:** Capable of withstanding extremely heavy radial loads and a certain amount of axial impact.
- **Adaptable to harsh working conditions:** Durable and rigid, suitable for heavy-duty, vibration, and dusty environments.

Type :	Spherical Roller Bearings	
Model :	53520	
Old Code :	22220E	
Main demensions :	100 mm × 180 mm × 46 mm	Bore Dia × Outside Dia × Width Dia
M kg:	5.2	Mass
HS Code :	8482300000	Bearing customs code
d mm:	100	inner ring diameter
D mm:	180	Outer ring diameter
B(T) mm:	46	Overall Width

Detailed parameters and installation dimensions:

international: 22220E , r: 3.5 mm

Radial double-row spherical roller bearings with a cylindrical inner ring hole

What are the applications of the 53520 bearing?

- **Metallurgy and Mining:** Rolling mills, crushers, vibrating screens, roller conveyors (withstanding high impact loads and compensating for shaft deflection under immense pressure).
- **Paper and Printing:** Press sections of paper machinery, printing presses (maintaining reliability and stability in humid, hot, and high-speed operating environments).
- **Energy and Environmental Protection:** Wind turbine main shafts, cement plant equipment, pellet mills (coping with heavy loads, vibrations, and harsh operating conditions, extending equipment lifespan, and reducing maintenance costs).
- **General Industry and Transportation:** Various speed reducers, gearboxes, railway vehicle axles (powerful radial load capacity, capable of withstanding bidirectional axial loads simultaneously).
- **Woodworking and Processing:** Woodworking machinery (suitable for cutting and processing scenarios with vibration and moderate loads).

How should choose the right model for a Spherical Roller Bearings?

1. Verify load and direction: Confirm that the bearing can withstand high radial loads and bidirectional axial loads. Generally, the axial load should not exceed 15-20% of the radial load, and in extreme cases, it should not exceed 35%, otherwise uneven stress may occur.

2. Confirm dimensions and tolerances: Determine the bore diameter, outer diameter, and width based on the installation space, and select the tolerance grade (e.g., PN grade) according to standards such as DIN 635-2 or ISO 15.

3. Select internal design: Select the cage type (e.g., CA type brass cage) and lubrication features (e.g., W33 outer ring oil groove and oil hole) according to the application.

4. Consider self-aligning capability: Check its maximum permissible self-aligning angle (usually 1° to 2°) to ensure it can compensate for installation errors or shaft deflection.

What is the mounting procedure for 53520 bearings?

1. Preparation and Cleaning: Before installation, be sure to clean the shaft and bearing housing, and check all mating surfaces for burrs or damage.

2. Heated Installation (Recommended): For interference fits, use an induction heater to evenly heat the bearing to 80-100°C, then quickly push it onto the shaft, pressing it against the shaft shoulder. Do not exceed 120°C to avoid altering the material structure.

3. Cold Installation (Alternative): If heating is not possible, use an installation sleeve and press to apply pressure only to the inner ring to press the bearing into place.

4. Securing and Lubrication: Tighten the bearing with a lock nut, etc., and add an appropriate amount of grease through the oil groove/hole.

5. Final Inspection: Manually rotate the shaft to confirm smooth rotation without abnormal noise, and recheck the bearing clearance.

Special Note for mounting 53520 bearings?

Load Limitation: Avoid prolonged exposure to excessive (>20%) pure axial loads, as this may overload the single-row rollers and significantly shorten their lifespan.

Temperature Control: During heated installation, strictly adhere to the 80-100°C range to prevent localized overheating.

Appropriate Lubrication: Double-row bearings require more grease, but the filler amount is generally 30%-60% of the bearing's internal space; excessive grease can easily cause overheating.

Installation Tools: Never directly strike the bearing's outer ring, cage, or rolling elements. Use specialized tools to apply force only to the mating rings.

Operational Monitoring: During the first run after installation, monitor temperature, vibration, and noise to ensure smooth operation.

Have you already decided on a specific model, or are you hesitating between several models? Tell me the model or application scenario, and I can help you analyze whether the selection is appropriate.

Tradebearing(TBS): <https://en.tradebearings.com/>

Email: admin@tradebearings.com

Whatsapp/Mob.: +86 15906428604